
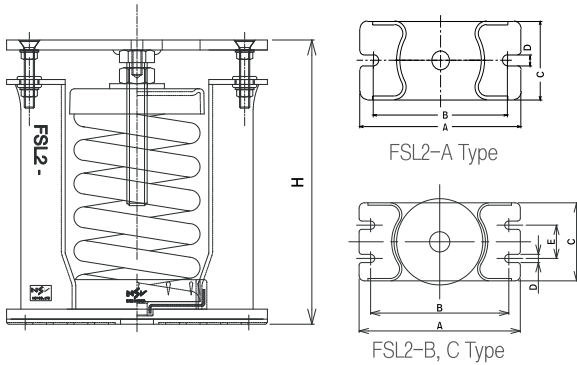


FSL2 Spring Mount (Deflection : 50mm)

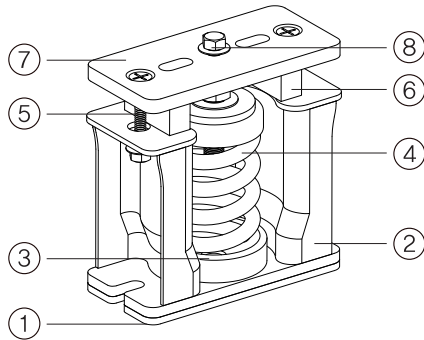

■ Features

As a type of FSL series, it uses SMA2 type (static deflection of 50mm) and prevents damage and distortion of the equipment and pipe. The upper housing (compression plate) has a restrain bolt and level bolt, while the CR-type acoustical non skid pad on the bottom is to prevent the transfer of high-frequency vibration.

■ Usage

- ◆ For refrigerator of reciprocating and turbo types
- ◆ For cooling towers
- ◆ For other large pieces of equipment of which weight often changes

■ Specification

No.	Name of Components	Material	Standard
1	Non Skid Pad	CR	KS M 6617
2	Lower Housing	SS400	KS D 3503
3	Spring Seat	CR	KS M 6617
4	Coil Spring	SUP9	KS B 2402
		HSW3	KS B 2403
5	Restrain Bolt	SS400	KS B 1002
6	Space Bar	Plastic	-
7	Upper Housing	SS400	KS D 3503
8	Level Bolt	SS400	KS B 1002





■ Dimension & Selection Guide

Type	Capacity (kgf)	Spring Constant (kgf/mm)	Weight (kg)	Color	Dimension(mm)						
					A	B	C	D	E	H	Level Blot
FSL2-A-200	200	4	10.60	White	220	183	100	14	-	212	M20 x 90
FSL2-A-300	300	6	10.70	Orange							
FSL2-A-400	400	8	10.90	Pink							
FSL2-A-500	500	10	18.00	Green							
FSL2-A-600	600	12	18.50	Blue							
FSL2-A-750	750	15	19.00	Black	280	234	150	14	64	288	M20 x 110
FSL2-A-1000	1000	20	19.50	Yellow							
FSL2-B-1200	1200	24	20.00	Red							
FSL2-B-1500	1500	30	32.50	Black							
FSL2-B-1800	1800	36	33.00	Blue							
FSL2-B-2000	2000	40	33.50	Yellow	310	266	150	16	64	338	M24 x 110
FSL2-B-2500	2500	50	34.00	Brown							
FSL2-C-3000	3000	60	39.00	White							
FSL2-C-3500	3500	70	40.00	Black							
FSL2-C-4000	4000	80	42.00	Orange							

(NOTE) The specification and data are subject to change without prior to for improvement of product performance and quality.

FSL2 Spring Mount (Deflection : 50mm)

FSL2 Test Data

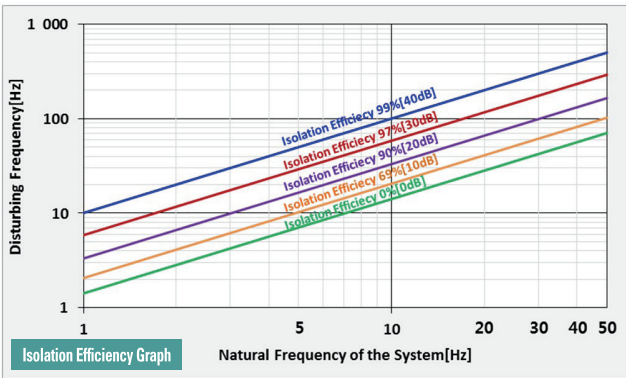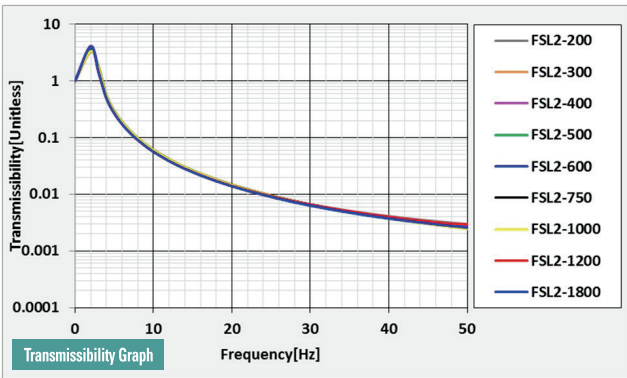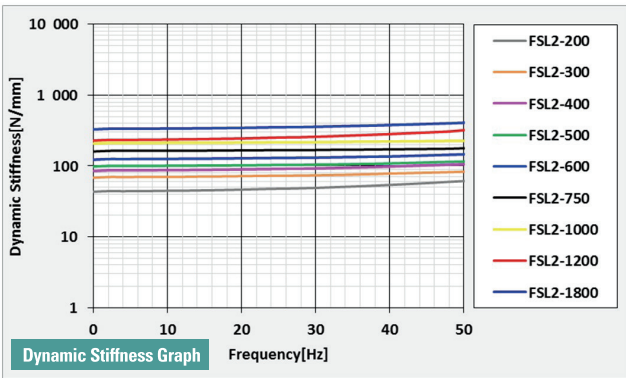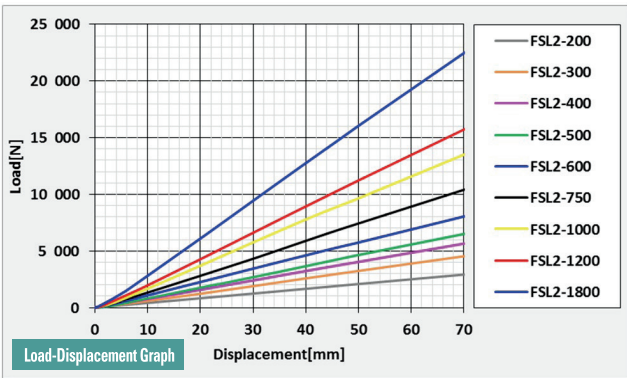

Installation Features

