

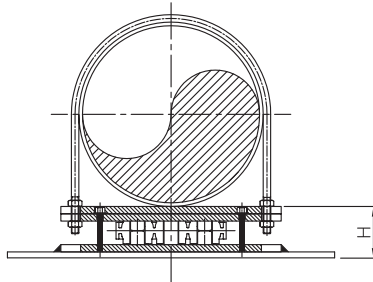


SRH-U Spring Rubber Mount (Deflection : 5.5mm)

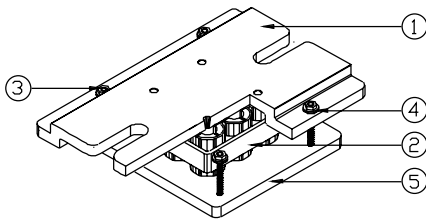

■ Features

It is an upgraded mount designed to control vibration from horizontal pipes using SRP type spring rubber pad with advantages of anti-vibration rubber and metal spring. SRH type is installed on top of steel structure individually or together to better absorb vibration from pipes. Plus, U-bolt slot hole is on steel plate of top and bottom housings, which facilitates installation and prevents pipes from getting out of their original location.

■ Usage

For horizontal pipes

■ Specification

No.	Name of Components	Material	Standard
1	Upper Housing	SS400	KS D 3503
2	SRP PAD	SUP9	KS B 2402
		CR	KS M 6617
3	Bolt & Nut	SS400	KS B 1002
4	Guide Rubber	CR	KS M 6617
5	Base Plate	SS400	KS D 3503

■ Dimension & Selection Guide

Pipe Diameter	SRP	A	B	C	H
Φ50	A(100,200)	110	84	86	40
Φ65		110	84	86	
Φ80		120	96	74	
Φ100		150	114	74	
Φ125		175	138	74	
Φ150		200	164	74	
Φ150	B(400~800)	220	160	122	42
Φ200	B(400~800)	270	210	122	
Φ250	B(400~800)	320	260	122	
Φ250	C(1000~2000)	320	260	140	
Φ300	B(400~800)	380	320	122	
Φ300	C(1000~2000)	380	320	140	42
Φ350		422	320		
Φ400		470	410		
Φ450		520	420		
Φ500		562	502		

(NOTE) The mentioned size and scale can be altered to improve the quality performance and capacity of the product without any notice.