
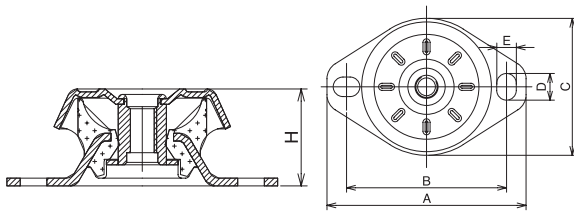


VM-2000 Rubber Mount(Deflection : 8mm)



■ Features

VM-2000 mount is a vibration isolator to easily control multi-axial vibration. Its inside is made of neoprene rubber to control excessive movement. At the center of rubber mounts there is a solid fixation nut, and the body was made of steel plate to fix firmly to the floor.

■ Specification



No.	Name of Components	Material	Standard
1	Non Skid Pad	CR	KS M 6617
2	Lower Housing	SS400	KS D 3503
3	Body	CR	KS M 6617
4	Upper Housing	SS400	KS D 3503
5	Level Bolt	SS400	KS B 1002

■ Dimension & Selection Guide

Type	Capacity (kgf)	Hardness (Hs)	Deflection (mm)	Weight (kg)	Dimension(mm)						
					A	B	C	D	E	H	Level Bolt
VM-2070	100	60±5	6	0.34	112	90	77	15	11	40	M12
VM-2080	300			0.73	135	110	90	17	13	45	M12
VM-2100	500			1.22	164	135	105	21	16	50	M16
VM-2120	1000			1.56	190	161	128	21	16	55	M16
VM-2150	1500			2.18	200	160	150	110	18	60	M16
VM-2180	2000			2.55	228	186	184	142	18	70	M16

(NOTE) The mentioned size and scale can be altered to improve the quality performance and capacity of the product without any notice.

VM-3000 Rubber Mount(Deflection : 6mm)



■ Features

A VM-3000 mount is capable of controlling vibration in multi-axis directions. The top stainless steel cap prevents a distortion of the vibration isolator by oil and water, and moreover, neoprene rubber is used inside to control excessive movement. Plus, it can be firmly fixed to the ground with the fixing nut inside the center of the neoprene rubber mount and steel plate on top and bottom.

■ Specification

No.	Name of Components	Material	Standard
1	Upper Housing	STS 304	KS D 3698
2	Lower Plate	SS400	KS D 3503
3	Body (Rubber)	CR	KS M 6617
4	Fix Nut	SS400	KS D 3503
5	Lever Bolt	SS400	KS B 1002

■ Dimension & Selection Guide

Type	Capacity(kgf)	Hardness(Hs)	Weight(kg)	Dimension(mm)					
VM-3060	100	60±5	0.24	A	B	C	D	H	Level Bolt
VM-3070	300		0.72	120	100	62	11	41	M12
VM-3090	500		1.80	150	126	78	13	50	M12
VM-3110	700		2.45	180	150	94	16	60	M16
			2.45	226	189	118	19	65	M16

(NOTE) The mentioned size and scale can be altered to improve the quality performance and capacity of the product without any notice.